

# METR4202 -- Robotics

## Tutorial 3 – Week 3: Solutions

---

The objective of this tutorial is to explore homogenous transformations. The MATLAB robotics toolbox developed by Peter Corke might be a useful aid<sup>1</sup>.

### Reading

Please read/review Please read/review chapter 7 of Robotics, Vision and Control. (<http://goo.gl/T3DJ0>)

### Review

Useful commands:


`Transl, trotx, troty, trotz, rotx, roty, rotz, tr2eul, DHFactor`

Familiarise yourself with the link class

### Questions

- For the robot shown in the following figure, find the table of DH parameters according to “Standard” DH conventions.

(note: you are allowed to move the initial frame to fit convention(s))

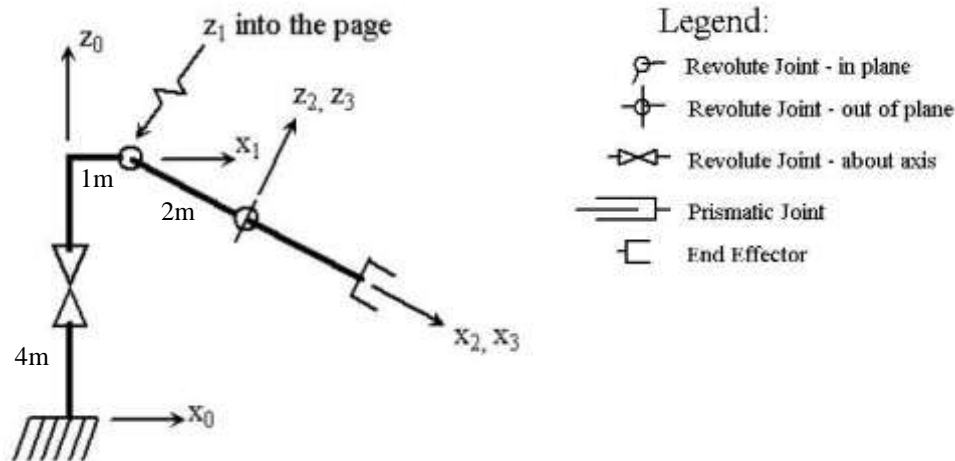

### Answers:

Link	From Frame	To Frame	$\theta_i$	$d_i$	$a_i$	$\alpha_i$
1	0	1	$\theta_1^*$	4	1	$-90^\circ$
2	1	2	$\theta_2^*$	0	2	$90^\circ$
3	2	3	$\theta_3^*$	0	0	0

➔ Note that the position of the end effector (the gripper) may be viewed as a position vector ( $\mathbf{P}^{\text{end\_effector}}$ ) in Frame 3.

<sup>1</sup> [http://petercorke.com/Robotics\\_Toolbox.html](http://petercorke.com/Robotics_Toolbox.html)

2.

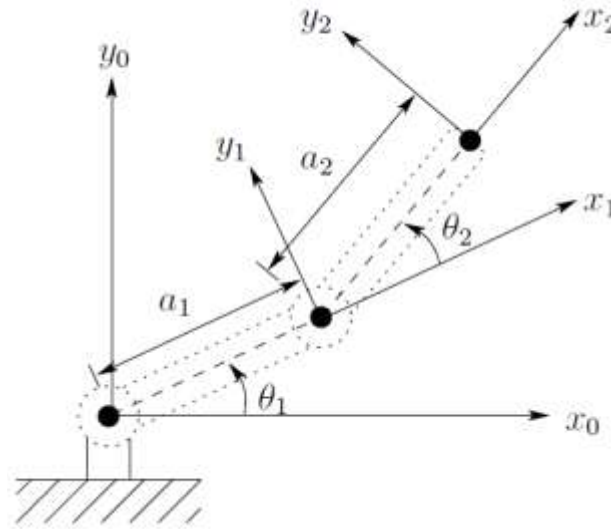


Figure 1: Two-link Planar Robot

a.) Determine the joint angles of the two-link planar arm.

The joint space of the robot is  $(\theta_1, \theta_2)$ .

The forward kinematics may be solved directly using the vector-loop method or somewhat more mechanically using the DH convention (see slides 24 and 42 of Lecture 3). This gives:

$$(p_x, p_y) = (a_1 c \theta_1 + a_2 c \theta_{12}, a_1 s \theta_1 + a_2 s \theta_{12})$$

The inverse kinematics involves solving the above simultaneous equation for  $\theta_1$  and  $\theta_2$ .

A geometric way of solving this is to observe that the distance from  $\{0\}$  to  $\{2\}$  is independent of  $\theta_1$ . Thus, sum of squares gives:

$$p_x^2 + p_y^2 = a_1^2 + a_2^2 + 2a_1 a_2 c \theta_2$$

$$\theta_2 = \arccos\left(\frac{p_x^2 + p_y^2 - a_1^2 - a_2^2}{2a_1 a_2}\right)$$

If  $\theta^*$  is an answer to the above, then, in general,  $-\theta^*$  will also be an answer. This corresponds to the “elbow up” and “elbow down” configurations.

Substituting this back into the kinematic equations gives:

$$p_x = (a_1 + a_2 c \theta_2) c \theta_1 - (a_2 s \theta_2) s \theta_1, p_y = (a_2 s \theta_2) c \theta_1 + (a_1 + a_2 c \theta_2) s \theta_1$$

$$c \theta_1 = \frac{p_x (a_1 + a_2 c \theta_2) + p_y (a_2 s \theta_2)}{a_1^2 + a_2^2 + 2a_1 a_2 c \theta_2}$$

$$s \theta_1 = \frac{-p_x (a_2 s \theta_2) + p_y (a_1 + a_2 c \theta_2)}{a_1^2 + a_2^2 + 2a_1 a_2 c \theta_2}$$

$$\theta_1 = \text{Atan2}(s \theta_1, c \theta_1)$$

If  $a_1 = 2$  and  $a_2 = 3$  what are the joint angles corresponding to an end effector position of  $(x,y)=(1, 1)$ .

$$\theta_1 = 167.028^\circ, \theta_2 = -156.44^\circ \text{ (Elbow down)}$$

$$\text{Or } \theta_1 = -77.028^\circ, \theta_2 = 156.44^\circ \text{ (Elbow up)}$$

To verify using the Robotics Toolbox:

```
L(1) = Link([ 0      0  2  0], 'standard')
L(2) = Link([ 0      0  3  0], 'standard')
twolink = SerialLink(L, 'name', 'two link')
T=rpy2tr(0,0,0); T(1:2, 4)=[1 1]
Qsol=twolink.ikine(T, zeros(1,2), [1 1 0 0 0 0])
```

Qsol =

```
2.9152   -2.7305
```